



Underwater
green LED
matrix display
1000 msw depth



Specifications

Mechanical

Dimensions (without connector) :

Body : 121 x Ø115 x 350 mm (weight in air 12.520 kg)

Body with brackets : 121 x 115 x 406 mm (weight in air 13.100 kg)

Stainless steel 316L et borosilicate

Electrical

Voltage : 18 – 30 VDC

Specific connector on demand

Control : RS485 interface

Auto standby, awake by external illumination (adjustable threshold)

Scrolling text display, programmable time display

Environment

Operating depth 1000 msw

Water temperatures of -10° C to 40° C


Options

3000 msw version on demand

Bracket on specification

Other body material on specification

Specific connector or penetrator

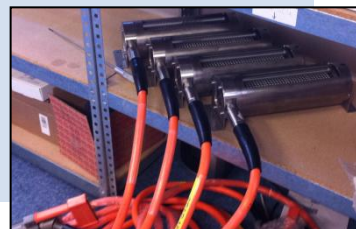

Head Office

901 Avenue Alphonse Lavallée

83210 La Farlède – France